



PLAN

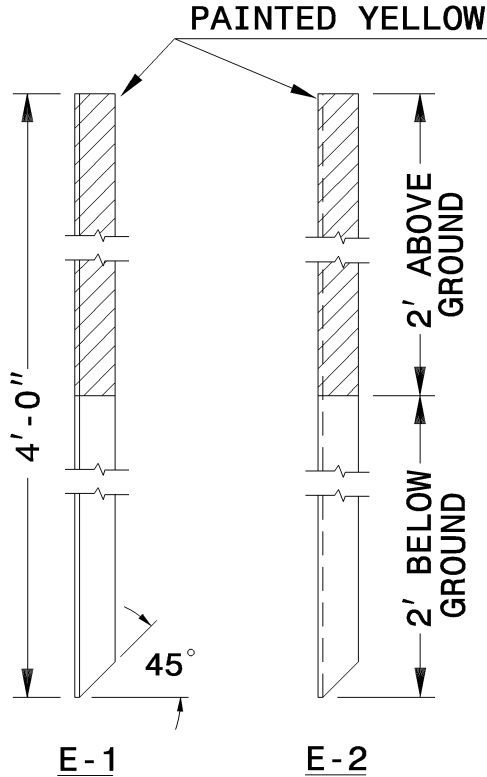

ELEVATION

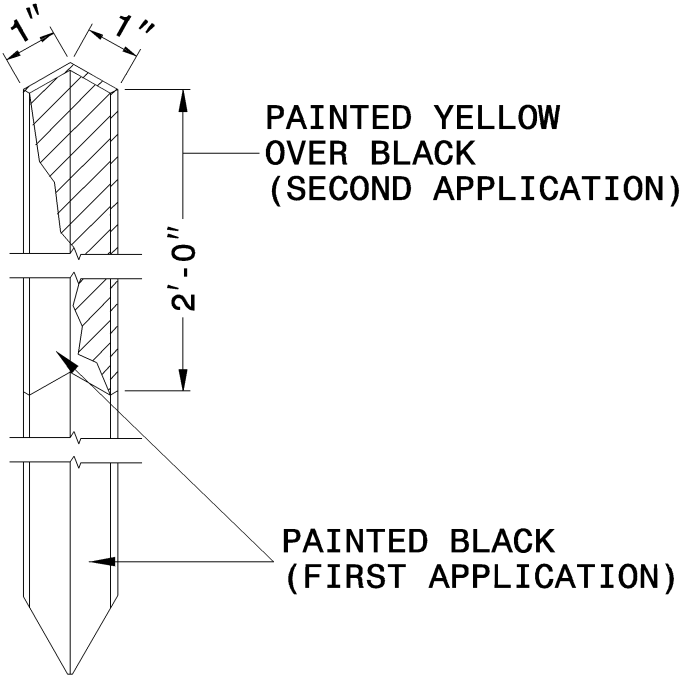

ISOMETRIC VIEW

LEGEND



GENERAL NOTES:

USE A36 GRADE STEEL. USE FLAT BLACK PAINT AS FIRST APPLICATION.

USE YELLOW AS SECOND APPLICATION FOR THE TOP HALF OF THE MARKER.

USE EXTERIOR OIL BASE FOR ALL PAINT.

USE MARKERS FOR SUBSURFACE AND SHOULDER DRAIN CONCRETE PADS.

PLACE MARKERS FOR OUTLETS AT DRAINAGE STRUCTURES WHERE APPLICABLE.